


RTS 330/430/530 Sheeter





STANDARD FEATURES

- HMI – 6inch colour TFT touch screen
- Speed control pot with automated speed limitation
- Web loop control
- Braked unwind with taper tension control
- Make ready control
- End of roll detection
- Cut options
 - Cut to register from a printed mark
 - Cut to register from a inter label gap
 - Cut to a predetermined length
- When cutting to register, a sensor window can be entered so that any print between the register marks will be ignored
- Missing sensor mark/label detection
- Inline mode, with automatic speed control. Interface volt free signals are supplied as standard if required
- Sheet quantity, machine will stop once the correct quantity of sheets have been produced
- Automated conveyor speed control
- Conveyor will bunch to sheets in a predetermined quantity
- Independent Jog functions for the driven nip and conveyor
- Machine alarm conditions displayed
- Multi lingual screen

OPTIONS



- Venturi edge trim extraction
- Clear on clear label sensor
- Additional nip drive wheels
- Rotary scissor slitting, complete with removable shafts and slide out knife box for easy setting
- Razor slitting

SPECIFICATION

- Maximum web width - 330 / 410
- Maximum master roll diameter - 700mm
- Unwind spindle diameter – 25mm to 76mm
- Loop control – Ultra sonic sensor
- Minimum slit width – 25mm
- Driven nip – Servo
- Sheeting knife – Driven guillotine
- Unwind tension control – Electromagnetic brake
- Conveyor length – 1000mm
- Cutting tolerance - +/- 0.15mm
- Air pressure – 80 Psi
- Supply voltage - 230 VAC 50/60 Hz
- Supply current rating – 10 Amps

DIMENSIONS

- L: 2510mm
- D: 1150mm
- H: 1570mm

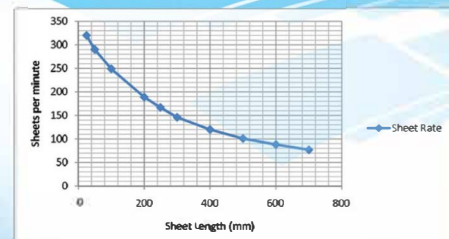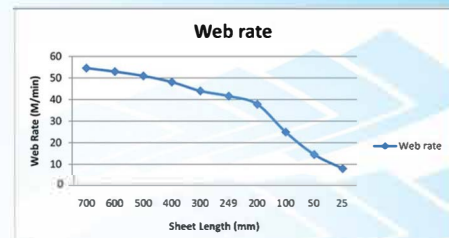

Distributor Details



AB Graphic Partner in Switzerland and Austria

CHROMOS Group AG
 Niederhaslstrasse 12
 CH-8157 Dielsdorf
 Tel. +41 44 855 50 00

www.chromos.ch/printing/weiterverarbeitung